



SERVICE KIT Usage
< [back](#)


Step 1

Thread anchor with tap.



Step 2

Turn stud in anchor.

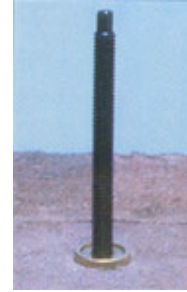

Step 3

Place extractor over stud.



Step 4

Thread castle nut onto extractor




Step 5

Place tool on castle nut and turn clockwise to remove anchor.



Step 6

Place square tip of stud into tool to remove old anchor from extractor

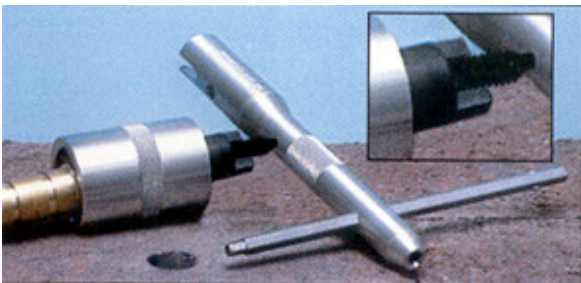

< [back](#)